
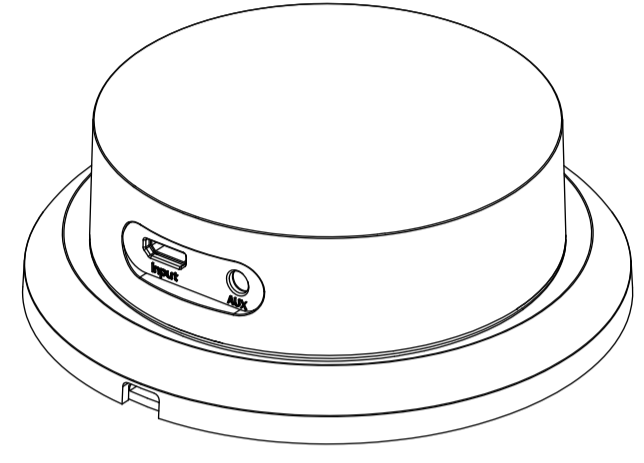



# 折页说明书 单黑印刷 size:125\*165MM

1004325284

**VOICE COMMAND CONVERTER**  
INSTRUCTION MANUAL

**Package contents and specification**

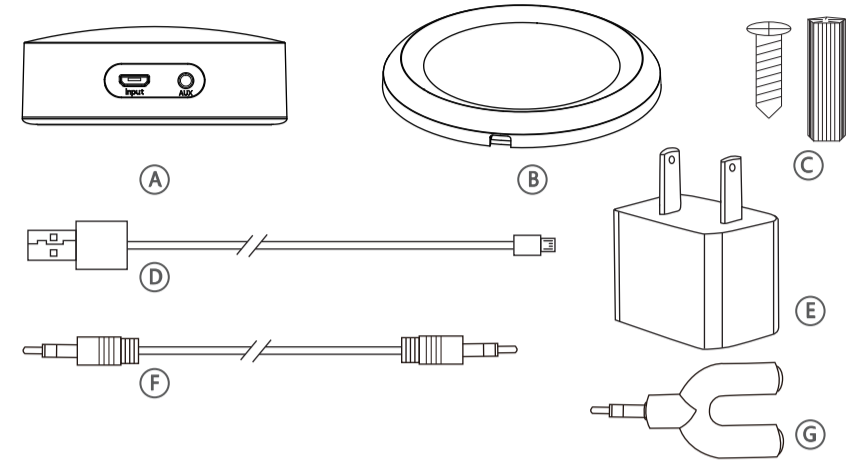


PART	DESCRIPTION	QUANTITY
A	Voice command converter	1
B	Converter base	1
C	Set screws plastic parts	3
D	USB power cable	1
E	Adapter	1
F	Audio line	1
G	Audio splitter connector	1
H	Punch mark paper	1


**Specification**  
INPUT: 100-240V ~ 50/60Hz, 0.3A  
OUTPUT: 5V ---1000mA  
OPERATION: Indoor  
OPERATING TEMPERATURE: -15° F TO 90° F (-26° C TO 32° C)  
WARRANTY: One Year Limited 1

**Installation notes**

1 The USB power cable is connected as shown below

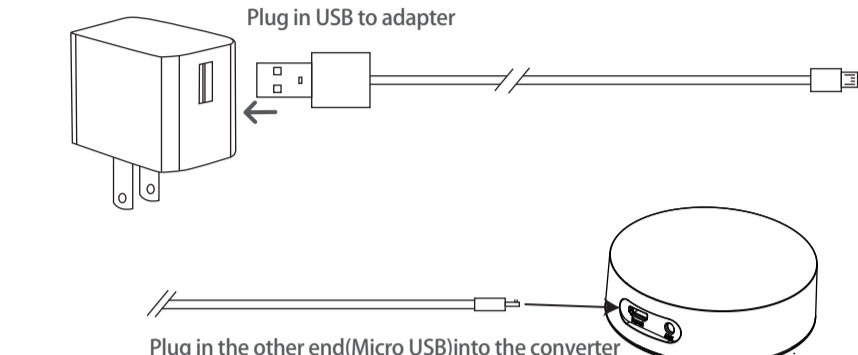


2 Connect the power adapter to the power supply

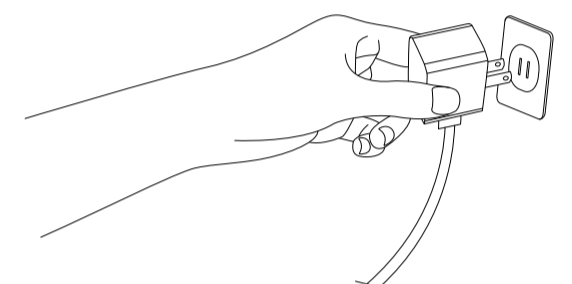

**Installation notes**


3 You can fix the product on the wall as follows:

a. Insert a tool to remove the top cover of the base. As shown in Figure 3-a

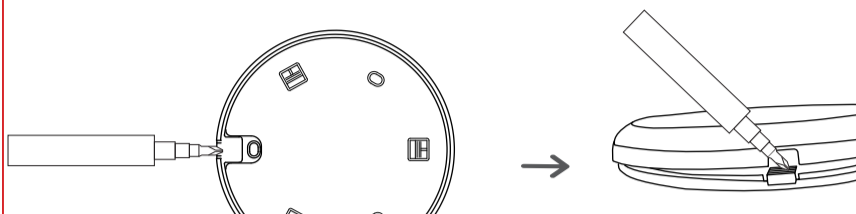

(Figure 3-a)


b. Place the punch mark paper on the wall you want to fix. As shown in Figure 3-b



(Figure 3-b)

**Installation notes**

c. Fix the punch mark paper and use a drill or other tool to punch holes in the corresponding three holes (please be safe, be careful not to hurt your fingers). As shown in Figure 3-c

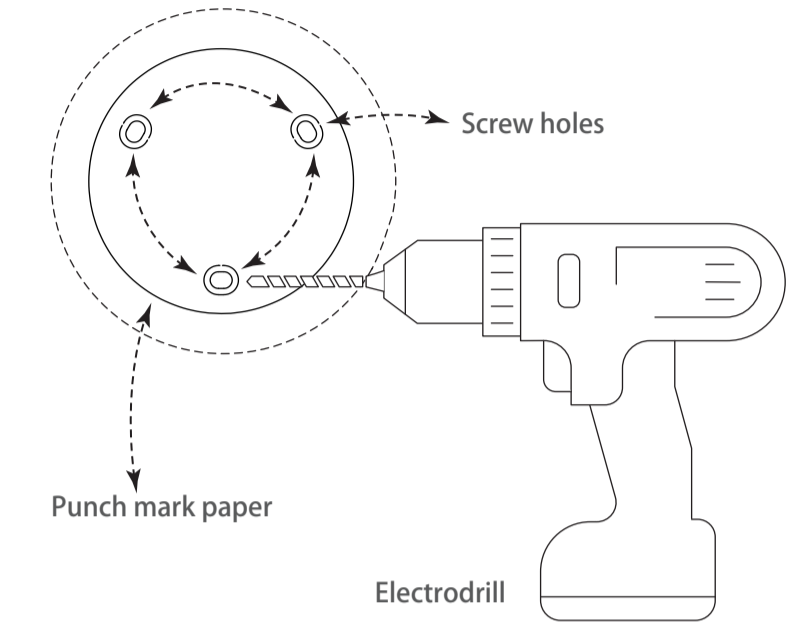


(Figure 3-c)

Note: The diameter of the hole is about 5mm, and the depth of the hole is about 35mm


**Installation notes**

d. Use a tool to insert the plastic expansion plug into the hole, then place the base alignment hole on the wall, and finally lock the thread into the hole. As shown in Figure 3-d

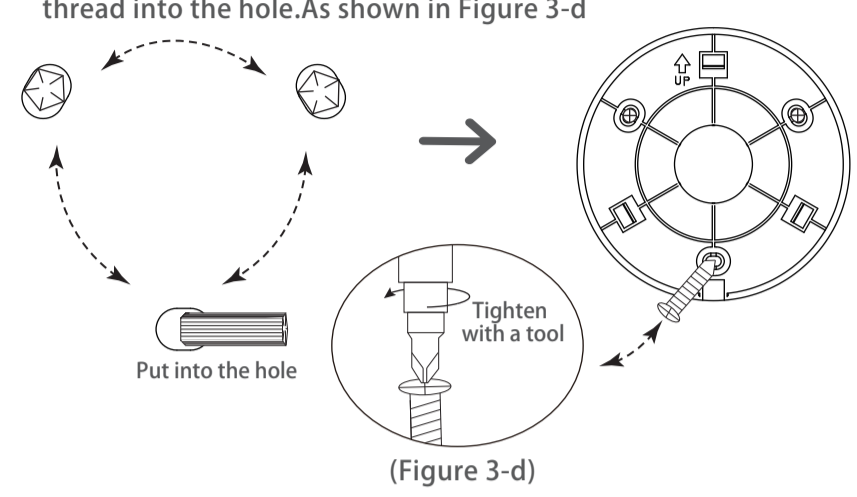

(Figure 3-d)

e. Fasten the top cover of the base and place the voice converter on the base. As shown in Figure 3-e

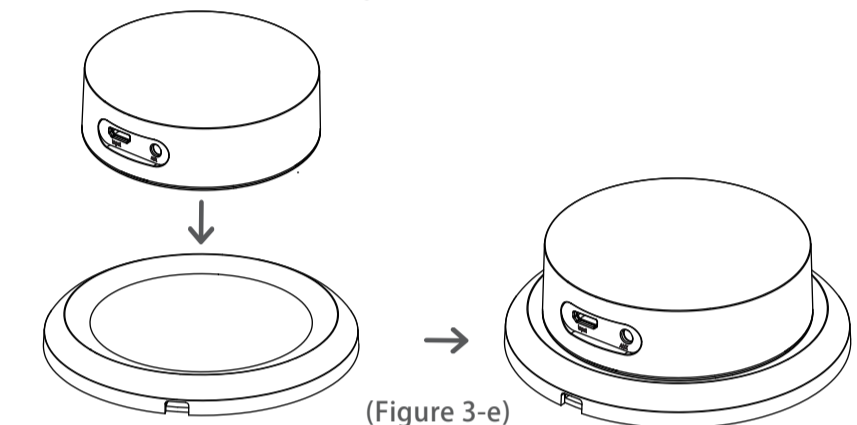

(Figure 3-e)

**Instructions for use**


1 Lights

The main state indicated by the lights as below:

- Rainbow color rotation—The device is in the state to be configured. You can use the APP to configure it.
- The blue light slowly dims after it lights up— The device has successfully connected to the network, and you can use it normally.
- Red light rotation— Disconnected from the network, please confirm the network or press and hold the bottom RESET button for 5 seconds to reset to the initial state.
- The green light slowly dims after it lights up— Prompt voice command has been triggered.

2 Button

Press the button at the bottom of the device and hold for more than 5 seconds, you can reset the Wi-Fi.

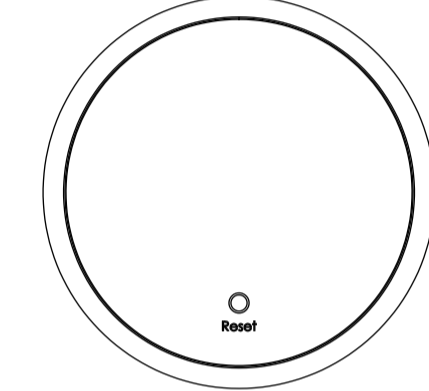


封面

**Instructions for use**


3 Audio

The product can be connected to an external audio source. At this time, the related Bluetooth products will follow the music, as follows:

1. Put the audio input port into AUX as below shown

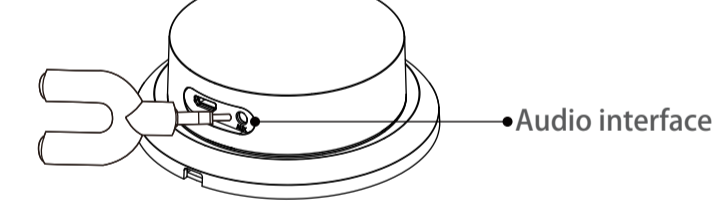

2. Connect the audio line between the audio input interface and your phone (or other music player), then the lights will flash follow the music beat.

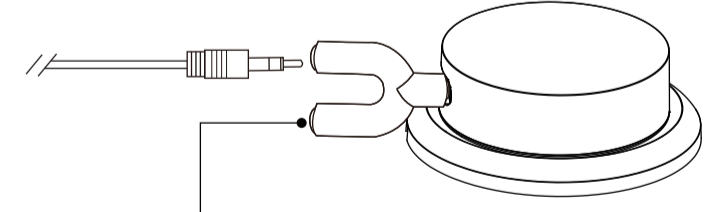


Audio input: support connecting earphones and other audio play device

**Instructions for use**

4 APP


a. Download the "Holiday Showhome" App from App Store (iOS) or Google Play (Android)

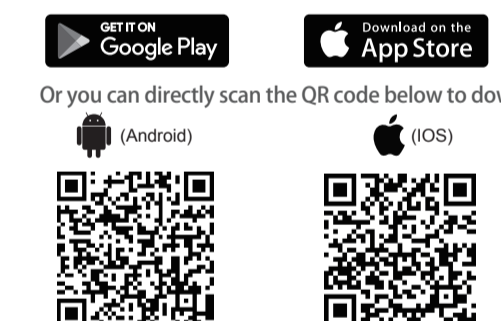

Or you can directly scan the QR code below to download:

(Android) (iOS)


b. Open the "Holiday Showhome" App and sign in.

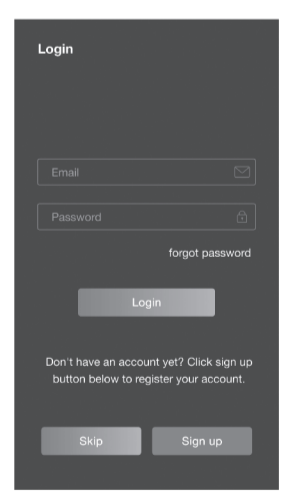


Notes: You can also click the Skip button to skip the login screen and use the visitor mode, but you will not be able to use voice control at this time.

**Instructions for use**

c. Click the Add Device button and select the Wi-Fi

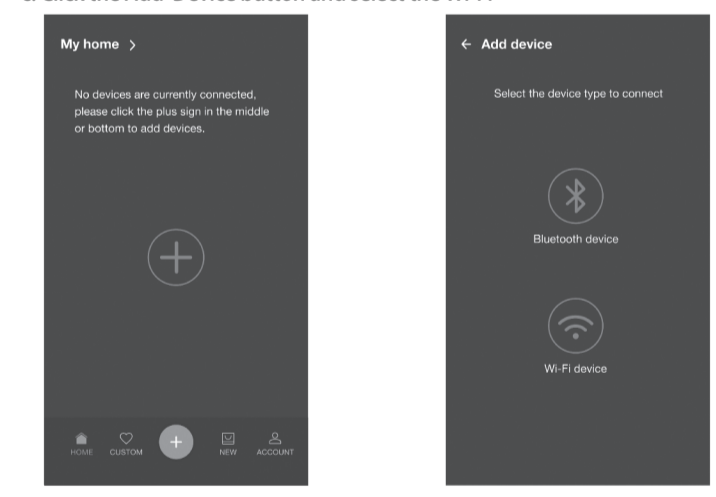


d. Click the Quickly add button after the scan is complete

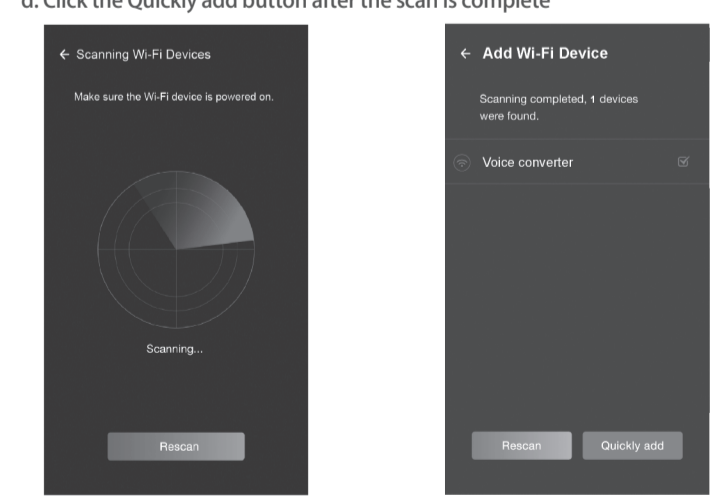

**Instructions for use**

e. Return to the home interface and click on the device to enter the operation interface.

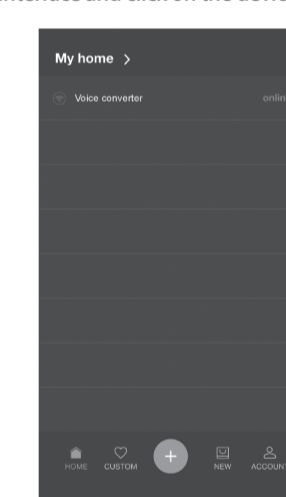

5 Voice

5-1. If you need to use voice control, please ensure that:

- \*Voice converter is connected to the network.
- \*Your Google assistant or Amazon alexa is connected to the network.

5-2. Voice control example for Google assistant:

User: Ok, google, ask Show Home (This is the brand name).

Google: You have voice converter and show tree and ultimate string, which device do you want to control?

User: Voice converter (This is the product name).

Google: Ok, voice converter is ready, which function do you want to try?

**Instructions for use**

User: Red (Color name. Other colors and themes are shown below).

Colors and themes:

Red, Green, Blue, White, Orange, Pink, Yellow, Gold, Cyan, Magenta, Purple, Christmas Day, Valentines Day, Independence Day, Halloween, St Patrick's Day, Thanksgiving, Multi-Color,

Google: Ok, the color has changed to red.

User: Steady (Mode name. Other modes are shown below).

Mode:

Turn on, Turn off, Steady, Sparkle, Blink, Fade, Waves, Rolling, Instead, Fireworks, Rainbow, Color Band, Show mode

Google: Ok, the mode has changed to steady.

6 Bluetooth products

This device is used to control other Bluetooth products. The specific list is as follows:

Holiday Showhome C9 Lights(24L)
Holiday Showhome C9 Lights(48L)
Holiday Showhome Icicles(24L)
Holiday Showhome Icicles(48L)
Holiday Showhome Candy Canes
Holiday Showhome LED Light Strip(10ft)
Holiday Showhome LED Light Strip(20ft)
Holiday Showhome LED Spotlights
Holiday Showhome RGB Show Tree

**FCC Caution.**


This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

\*RF warning for Mobile device:  
This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.



Scan & See Me!  
www.ishowtree.com

封底